

Homes 7kW/22kW

Version 2.0




OCULAR


Charging ahead, Powering tomorrow.

Welcome to the future of charging with the IQ Home, our cutting-edge charging solution is designed to meet the needs of modern electric vehicle owners, offering versatility, efficiency, and convenience at their doorstep. The IQ Home comes in both single-phase (7kW) and three-phase (22kW) configurations and is compatible with all electric vehicles in Australia.

The system comes with CT clamps to measure your solar production excess, which enables you to charge with green, free electricity from your solar panels, and protects your home from overloading.

The IQ Home has three different charging modes to suit your individual needs and solar production levels. Built to withstand the Australian elements, it comes with IP55 protection, ensuring reliable performance in any weather conditions. The unit's compact design makes it ideal for residential settings, allowing for easy installation and seamless integration into your home. Equipped with a 5m type 2 cable, the charger offers convenient and hassle-free charging for your EV.

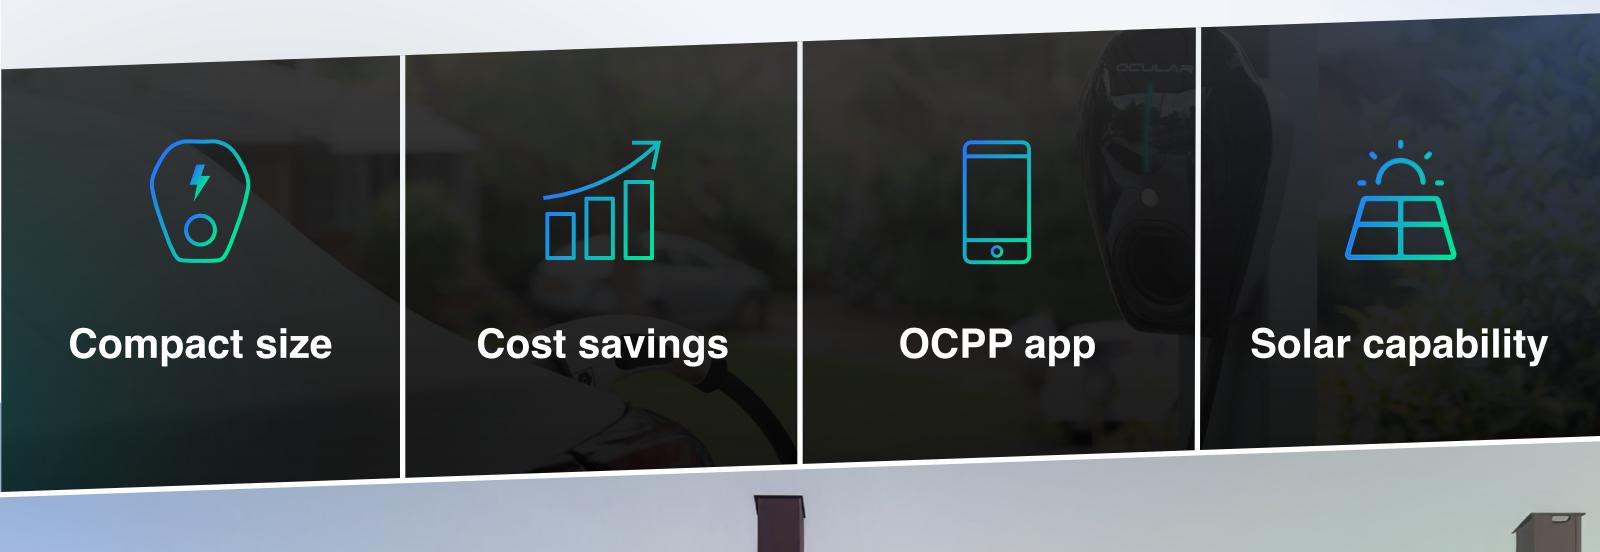

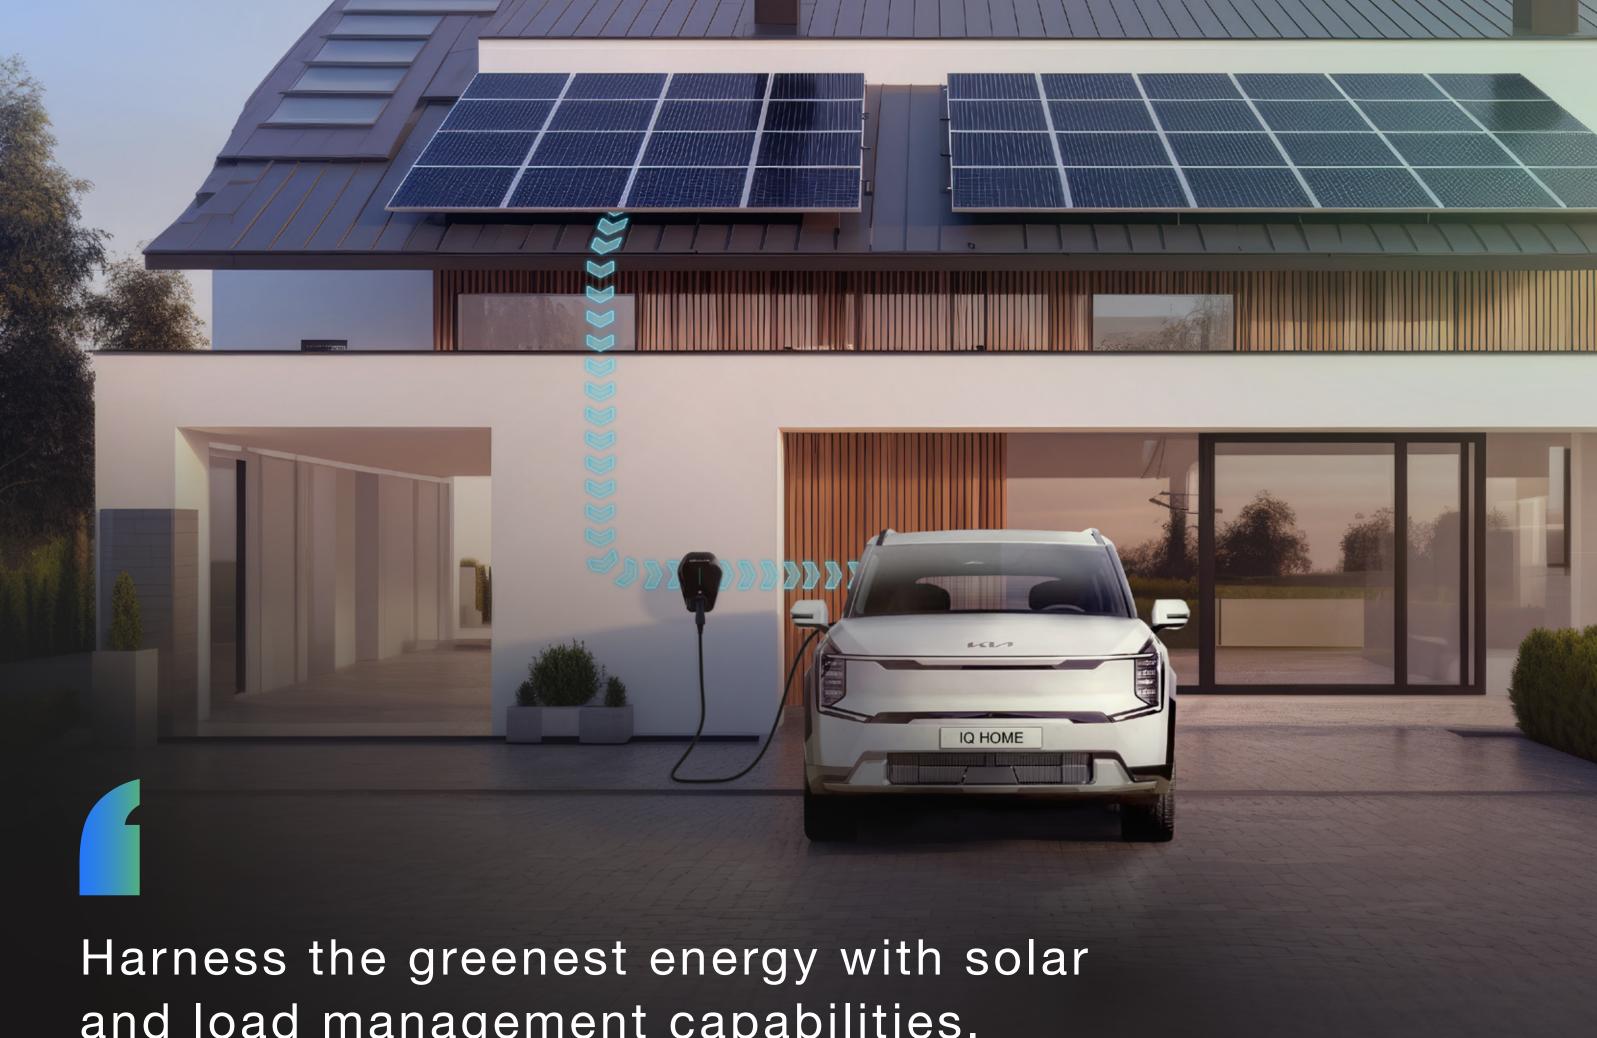

and load management capabilities.

FAST MODE

Maximum power from a renewable energy source or grid power

SOLAR ASSIST MODE

Minimum of 6 Amps plus any excess solar produced

SOLAR ONLY MODE


Charges only when excess solar power is produced





Designed to create enduring value for Australian homes offering flexibility and efficiency while combining advanced technology with user-friendly features.

OCULAR SMART HOME APP

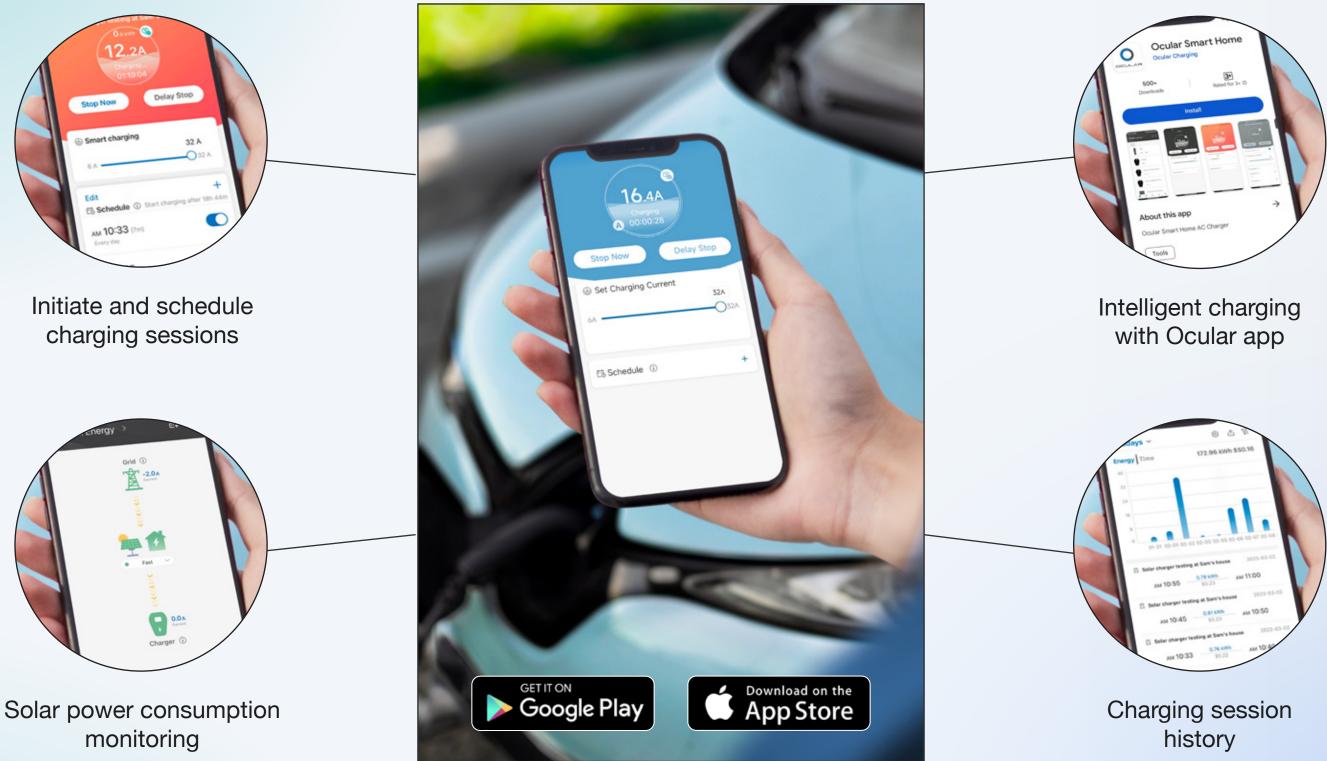





With OCPP 1.6 and 2.0.1 capability, the IQ Home seamlessly integrates with your phone for real-time monitoring and analysis.



Reduce your installation and energy costs with solar and load balancing functionality.



OCULAR IQ HOME

DATASHEET

	Model Number	IOCAH15-7T
	Input Voltage & Current	230V± 20%
	Frequency (Hz)	50
	Charging Connector	IEC62196 T
	Current Transformers Included	1
	Current Transformer Specifications	20m cable, Fits 16mm diame
	Power Output	7.2kW (1- Phase)
	Output Voltage	230V ± 20%
	Output Current	32A MA
	User Interaction	Mobile App,
	OCPP Compatibility	1.6J and 2.0.1
	Operating Temperature	-30°C to +50
	Storage Temperature	-40°C to +7
	Working Humidity	5% - 95% relative hu
	IP Rating	
	Internal RCD	30mA A0
	Electrical Protection	Over current, Short circuit Ground fault, Lightning
	Energy Meter	Inte
	Internet Connection	Etherr
	Mounting	Wal
	Dimension (H x W x D, mm)	290 * 21
	Net Weight	4.5kg
	Recommended Cable Size (50m run)	10mm2 2C+E
-	Recommended Circuit Breaker	40A single phase type A RCBC
	Certification	CE, IEC /EN 61851-1, IEC IEC/EN 618
	Warranty	2

IOCAH15-22T

, 32A per phase

D/60Hz

ype-2 5m cable

3

eter cable up to 100A max current

22kW (3- Phase)

400V ± 20%

X per phase

, Physical button

(firmware upgrade)

0°C in operation

70°C in storage

umidity, non-condensing

IP55

C & 6mA DC

, Over voltage, Under voltage, g surge, Over temperature

egrated

net, Wi-Fi

ll-Mount

10 * 125 mm

4.7kg

10mm2 4C+E

2 40A three phase type A RCBO

61008-1-A1, IEC 62955-1-A1, 851-21-2, RCM

years

POWERING THE JOURNEYS OF AUSTRALIA





homes enabled with ev charging



65+

electric vehicle variants compatible





\$150K+

cumulative cost savings

Charging ahead, powering tomorrow.



sales@ocularcharging.com.au





Sec. 1300 912 650