



# OCULAR

## Ocular IQ Wallbox v2



IOCAW13-7S / IOCAW13-7T  
IOCAW13-22S / IOCAW13-22T

Easy configuration to any charging network

OCA & OCPI official member

OCPP 1.6J Compatible

Indoor and Outdoor Rated

Stay in the know with a LCD screen

Fast, sustainable and compatible with every EV in Australia. Meet the Ocular IQ Wallbox. The Ocular IQ Wallbox is an intelligent solution across homes, apartments, fleets, destinations, and light commercial applications.

### Main Features

#### Unique Design

2.8" LCD display for excellent clarity and LED indicator

#### Flexible output current

Output current adjustment via back office

#### Multiple Charging Standard Compliant

Type-1 connector, Type-2 connector or Type-2 socket

#### OCPP Compatibility

OCPP1.6J support for easy back-office integration


#### 2 different Models

1-phase 7kW & 3-Phase 22kW available

# Specification

Model	IOCAW13-7S / IOCAW13-7T   IOCAW13-22S / IOCAW13-22T	
Input Voltage & Current	230V $\pm$ 20%, 32A / phase	
Frequency (Hz)	50/60Hz	
Charging Connector	Type-2 socket/Tethered cable	
Power Output	7.4kW (1- Phase)	22kW (3- Phase)
Output Voltage	230V $\pm$ 20%	400V $\pm$ 20%
Output Current	32A MAX per phase	
Display	2.8" LCD screen	
User Authentication	RFID Card, Mobile App, Remote Access	
Operating Temperature	-30°C to +55°C in operation	
Storage Temperature	-40°C to +75°C in storage	
Working Humidity	95% relative humidity, non-condensing	
Internal RCD	Type-A RCD + 6mA DC	
IP Performance	IP55	
Meter	MID Meter	
Internet connection	Ethernet + Wi-Fi + 4G	
Mounting	Wall-Mount/Pole-Mount	
Charging Cable Length	Tethered model only - 5m	
Dimension (H x W x D, mm)	380 x 288 x 160 mm	
Net Weight	(1- Phase) 5.3 kg (socket type) 7.8 kg (tethered)	(3- Phase) 5.4 kg (socket type) 8.1 kg (tethered)
Recommended circuit breaker	40A single phase type A RCBO	40A three phase type A RCBO
Recommended cable size (50m run)	10mm <sup>2</sup> 2C+E	10mm <sup>2</sup> 4C+E
Certificate	CE, IEC /EN 61851-1, IEC/EN 61851-23, IEC/EN 61851-21-2, RCM	
Warranty	2 years	
Electrical Protection	Over current, Short circuit, Over voltage, Under voltage, Ground fault, Lightning Surge, Over temperature	

# OCULAR

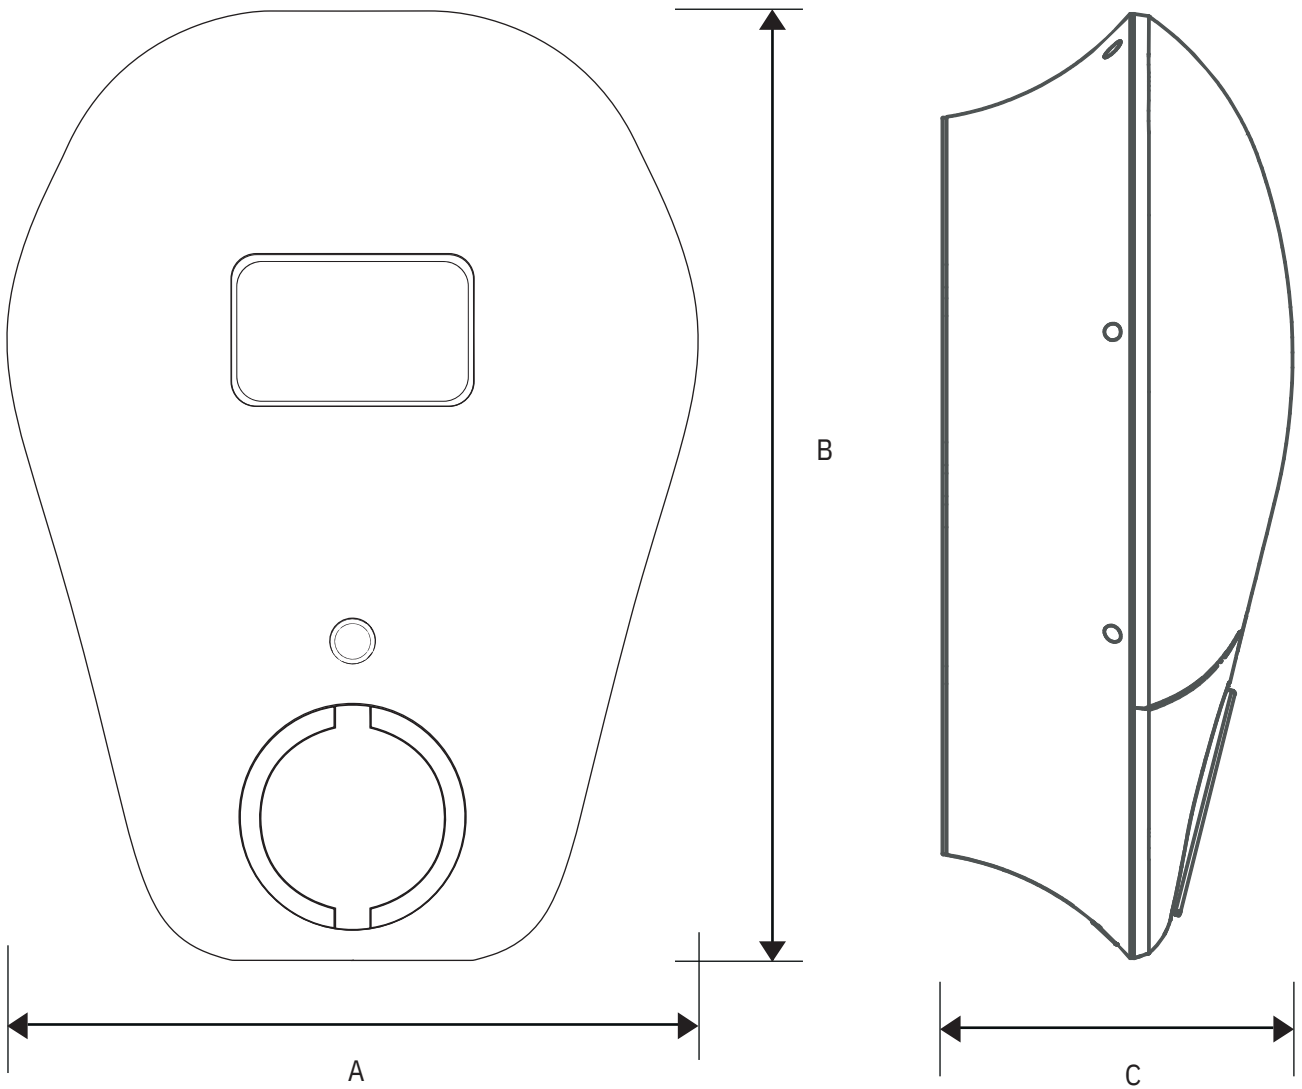

Size	A	B	C
380x288 x160mm	288	380	160

# OCULAR

